


SHC55

Handheld Controller



SHC55 Handheld Controller

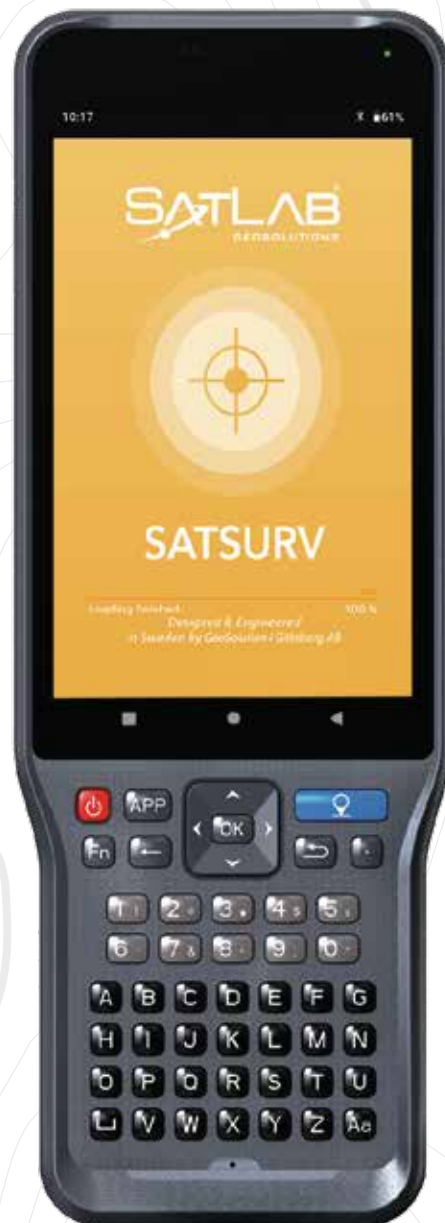

5.5" sunlight readable display capacitive touch screen for fingers or stylus.



Alphanumeric full keyboard designed, convenient for different measurement application scenarios.



Quick charge with internal lithium battery to improve efficiency under long time job.



Android 10.0 operating system equipped to maintain the productivity of numerous survey projects and data.

Data Specifications

GNSS

Signal Tracking

GNSS antenna
GPS
GLONASS BDS
AGPS

No. of Channels

20

COMMUNICATION INTERFACE

Cellular mobile

4 G, Dual SIM

WiFi

IEEE 802.11 b/g/n, Wapi, AP

Bluetooth

Built-in Bluetooth (2.1+4.0) NFC

USB

USB, TypeC interface, OTG

SYSTEM

Operating System

Android 10

Processor

CPU: 8 core; 2.0 GHZ

Storage

2 GB RAM+16 GB ROM;
T-Flash memory card, up to 128GB

Display

5.5", bright Outdoor Color capacitive touch screen (with touch pen, can be operated with gloves)

Input Configuration

Physical full keyboard, number / letter separate, professional custom smart input method

GENERAL

Application

Camera: Built-in 13 million pixel camera
Flash: Highlight Flash LED flash(support flashlight function)

Sensor: gravity sensor, compass, light sensor, gyroscope

Environmental

MIL-STD-810H

IP68 environmental protection

Drop resistant 1.2m

Temperature -20°C to 60°C Operating
-30°C to 70°C Storage

Physical Properties

Size: 236mm x 85mm x 25mm

Weight: 480g within battery

Battery: 7500 mAh internal

Operation Time: 14hours



Headquarters:

Järnbrotts Prästväg, 2
421 47 Vastra Frolunda
Goteborg, Sweden

Regional Offices:

Warsaw, Poland
Jičín, Czech Republic
Ankara, Turkey
Scottsdale, USA
Singapore
Hong Kong, China
Dubai, UAE

www.satlab.com.se

